

SOB1400 Manual

SINOXone

SOB1400 INSTALLATION MANUAL

1. Technical Parameter

Max VESA:400x400; Maximum load:35kg; Tilt -10 to 0 degrees.

2. Parts List

Please check the parts in the package in comparison with the following list,make sure all of the parts are in the package. Never use defective parts, never replace part with different specification.



(A)M6x50 Self-tap Screw (4)



(B)8x40 Plastic Anchor (4)



(C)D6 Flat Washer (4)



(D)D5,6,8 Flat Washer (4)



(E)5mm Plastic Spacer(8)



(F)15mm Plastic Spacer (4)



(G)M5x14 Screw (4)



(H)M6x14 Screw(4)



(I)M6x30 Screw (4)



(J)M8x20 Screw (4)



(K)M8x45 Screw(4)




(L)Bubble Level (1)

3. Installation and operation instructions

Note: please read the instructions carefully before installation!


STEP-1

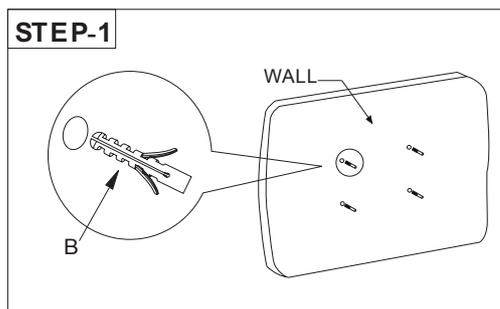

Step 1:

Use the wall plate as a template to drill four holes of dia. 8mm and 40mm depth in the wall. Then wedge four plastic anchors into the holes.


STEP-2

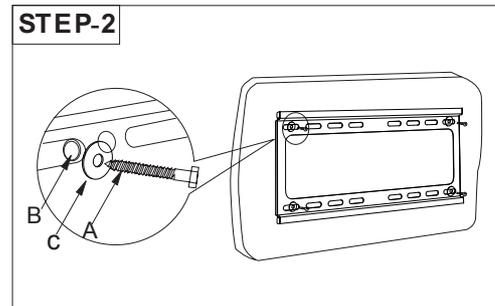

Step 2:

Install the wall plate. Put the wall plate on the wall, and then screw four self-tap screws into each plastic anchor through metal washer to fix the wall plate onto the wall.


STEP-3

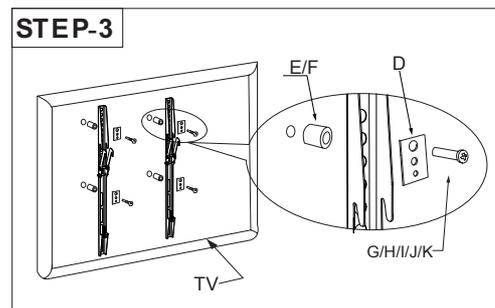

Step 3:

Install the bracket rail onto the back of the TV: Select suitable screws from the screw package according to the size of the holes in the back of TV. Fix the two hanging arms onto the back of TV by screws into the holes. Make sure equal height of the two hanging arms.


STEP-4

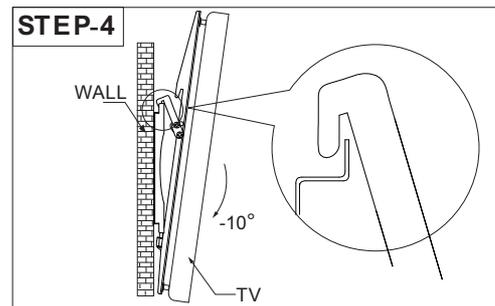

Step 4:

Hanging the TV onto the wall plate, relax the hands until they are caught hold of.

STEP-5

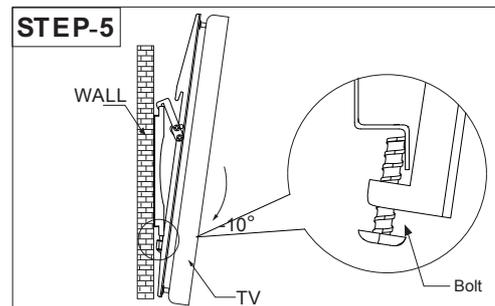

Step 5:

Tighten the screw of the two hanging arms to make sure the TV has been fixed firmly.

SOB1600 Manual

SINOXone


SOB1600 INSTALLATION MANUAL

1. Technical Parameter

Max VESA:600x400; Maximum load:35kg; Tilt -10 to 0 degrees.


2. Parts List

Please check the parts in the package in comparison with the following list,make sure all of the parts are in the package. Never use defective parts, never replace part with different specification.

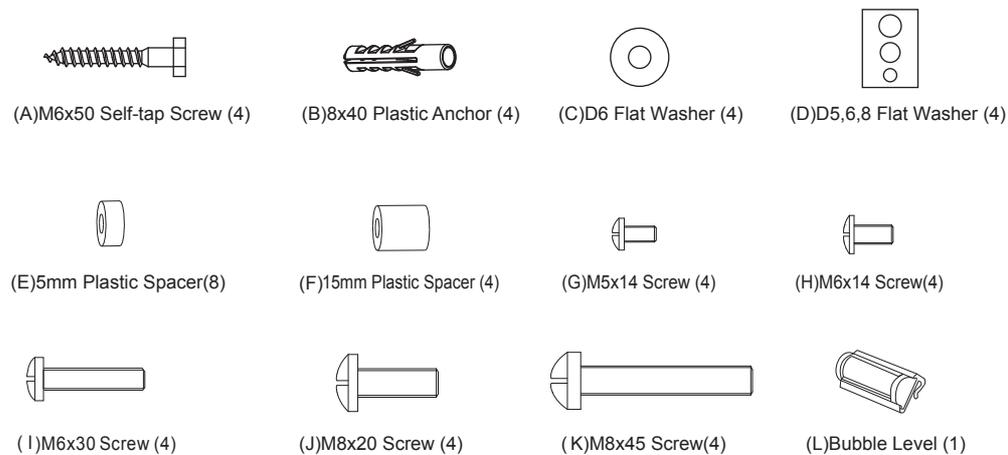


3. Installation and operation instructions


Note: please read the instructions carefully before installation!

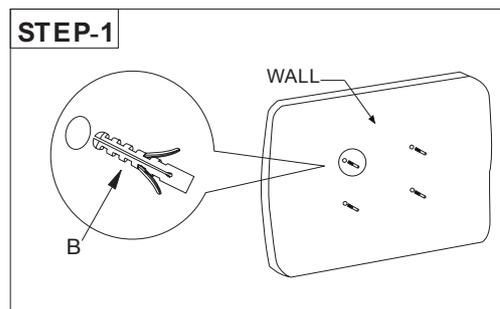


Step 1:
Use the wall plate as a template to drill four holes of dia. 8mm and 40mm depth in the wall. Then wedge four plastic anchors into the holes.

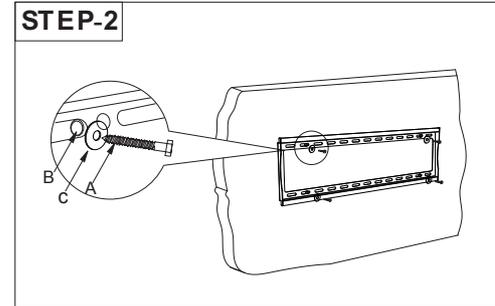


Step 2:
Install the wall plate. Put the wall plate on the wall, and then screw four self-tap screws into each plastic anchor through metal washer to fix the wall plate onto the wall.

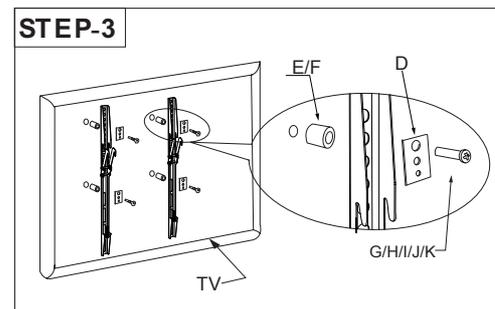

Step 3:
Install the bracket rail onto the back of the TV: Select suitable screws from the screw package according to the size of the holes in the back of TV. Fix the two hanging arms onto the back of TV by screws into the holes.Make sure equal height of the two hanging arms.

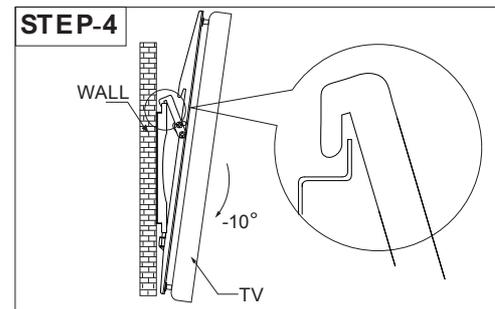

Step 4:
Hanging the TV onto the wall plate, relax the hands until they are caught hold of.

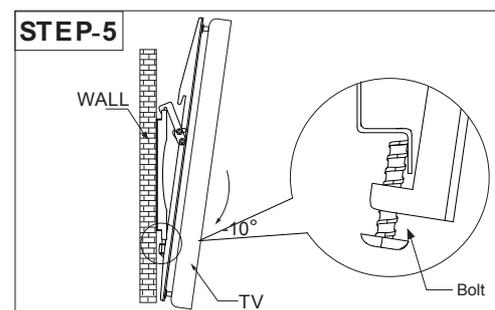

Step 5:
Tighten the screw of the two hanging arms to make sure the TV has been fixed firmly.