

SOB0140 Installation Manual

1. Technical parameter

Size of flat panel TV: 10"~32"

Maximum load: 20kg


Swing angle: $\pm 90^\circ$

Pitching angle: $+15^\circ \sim -15^\circ$

Distance from wall: 48~377mm


2. Part List

Please check the parts in the package in comparison with the following list. Make sure all of the parts are in the package. Never use defective parts. Never replace part with different specification.

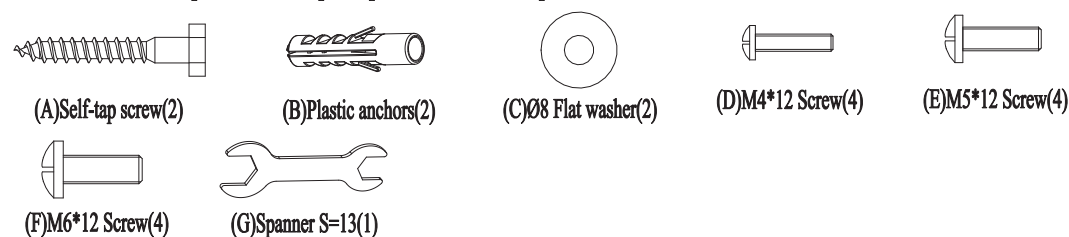


3. Installation and operation instructions

Note: please read the instructions carefully before installation!

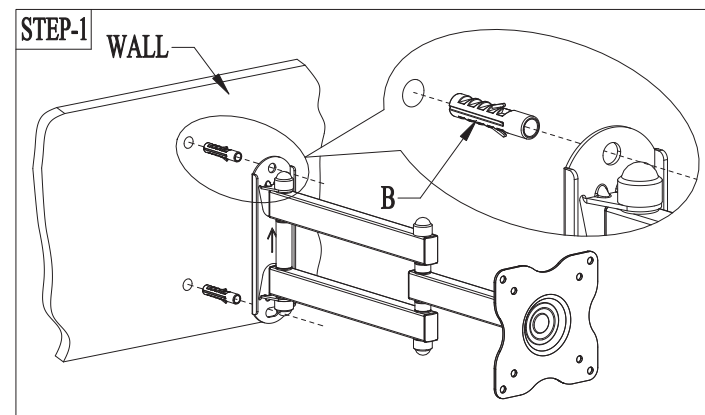

Step 1:


Use the wall plate as a templet to drill two holes of Ø10mm diameter and 50mm depth in the vertical wall. Then wedge two plastic concrete anchors into the holes.

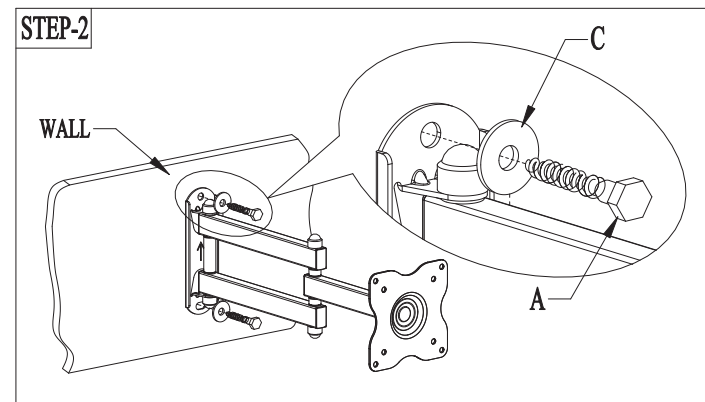

Step 2:


Fix the wall plate with two lag bolts through the mounting holes to install the wall plate on the vertical wall firmly.

STEP-3

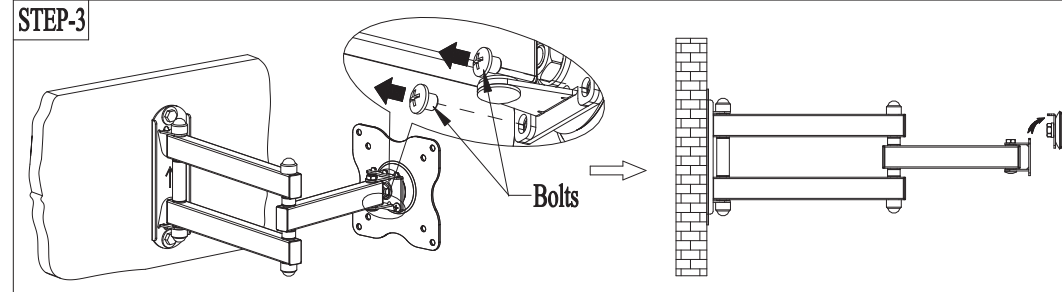

Step 3: Using the tools to loosen the two bolts under the TV plate. Lift and remove the TV plate from the wall plate.


STEP-4

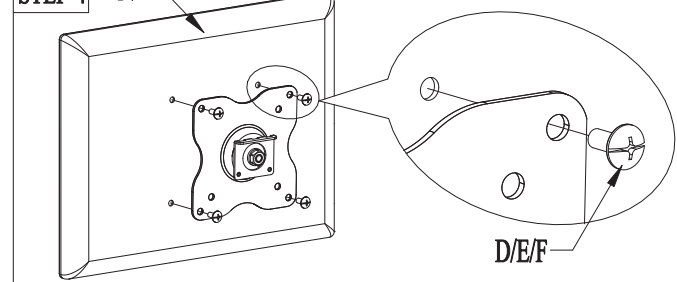

Step 4:


Install the panel TV on the TV fixed plate with suitable bolts selected from the parts bag. At last adjust the azimuth of the panel TV to a suitable position for watching.

STEP-5

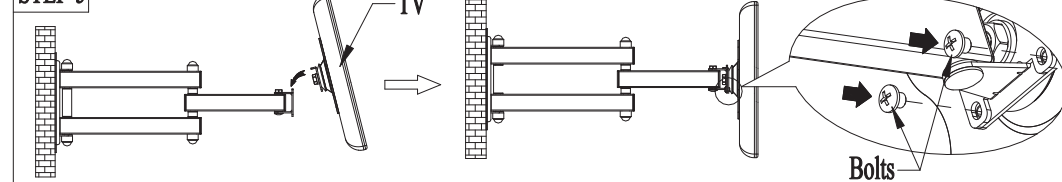

Step 5: Lift the display together with the TV plate above the wall plate, Insert the TV plate to the wall plate as shown in the fig. Then using the tools to tighten the two bolts to fix them firmly.


STEP-6

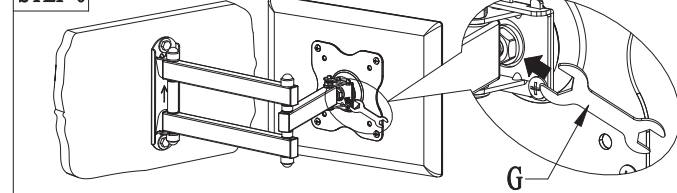

Step 6:

Tension is pre-set at the factory. Some time you may loosen nut to adjust tension. Tighten the nut after moving the TV to desired location.

STEP-7

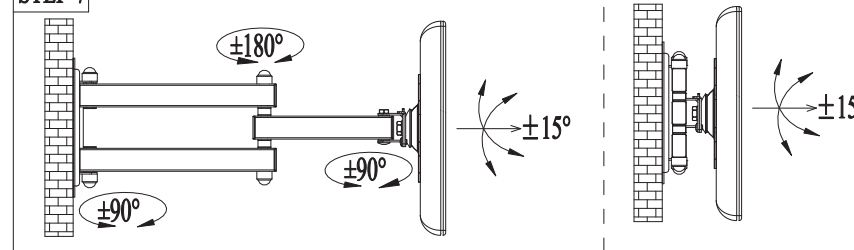

Step 7:

The view angle of the display can be adjusted between in the specific range as shown in the fig.